



HANDI® 450 SINGLE FACE

Analog clock HANDI® Single face
Aluminium case
Distance of legibility: 35m



Time setting

The professional HANDI® clocks can display the same information, by synchronizing through a master clock or a time server.
On pulse version, the time setting is manual

Internal time base

HANDI® has its own **temperature compensated TCXO time** base which allows an accuracy about 0.2 sec / day between 0° to 40°C in case of synchronization loss.

Specifications

Power supply (depending on versions)	230VAC or 110-240VAC 12-24VDC PoE (Power Over Ethernet – IEEE802.3af)*
Certifications	CE, EN 62368, EN 55032, EN 55035, ROHS
IP	IP 40 standard
MTBF	85 000 h
MTTR	15 min
Operating temperature	Without illumination: 0 to +50°C With illumination: -10°C to +50°C
Weight	2.2 kg
Dimensions	Diameter: 441 mm Thickness: 62 mm

*Cable length available 0.80m

Storage conditions


Conditions	Temperature	Hygrometry	Maximum cumulative duration
Extreme	-20°C to 10°C	10 to 85% HR	48h
Extreme	40°C to 70°C	10 to 85% HR	48h
Normal	10°C to 40°C	10 to 85% HR	6 months

The product must be lit for 4 hours every 3 months to keep its characteristics

* see the user manual for more information

Standard Dial

- Arabic figures screen printed in black
- Black lacquered hands
- Trade mark and logo GORGY TIMING screen printed on the dial

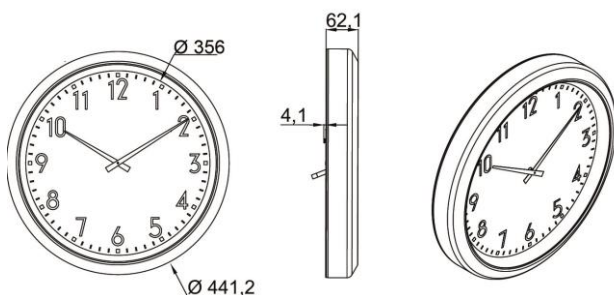

Key features

- Fast but approximate reading of time +/- 0.5 index**
- Flat aluminium case
- Acrylic front cover (Polymethyl methacrylate)
- Wall mounting or ceiling mounting with bracket or flag
- Time setting by synchronization source
- LED illumination in option
- For indoor use

Remote management (on NTP version)

- Synchronisation up to 3 NTP servers
- Time zone selection and automatic summer/winter time change
- Supervision by SNMP v1, v2c
- Accessible configurations by HTTP and/or HTTPS
- IPv4 protocol compatibility

Synchronisation input

- AFNOR NFS 87500/IRIG B126
- NTP/SNTP (v2, v3, v4) - Ethernet 10/100 base T
- NTP Wi-Fi (IEEE 802.11 a/b/g/n standards 2.4 Ghz)
- ASCII: RS 485
- DCF 24VDC (synchro: DCF code + power: 24V in pair telecom cable)
- Pulse version*: parallel reversed minute receiver 24V


*No internal time base

Dial design


Standard: 0




Option: 1



Option: 2



Option: 5



HANDI® 450 - SINGLE FACE

ITEM CODE

H 7 4 0 / 4

VERSION		↑	↑	↑	↑	↑	↑
Minute 24V/6mA slave movement (without second sweep hand) <input type="checkbox"/>		3					
AFNOR NFS 87500 (230VAC power supply) <input checked="" type="checkbox"/>		9					
AFNOR NFS 87500 (12-24 VDC power supply) <input checked="" type="checkbox"/>		7					
⁽¹⁾ ASCII RS 485* (230VAC power supply) <input checked="" type="checkbox"/>		Q					
NTP Ethernet 10/100BaseT Synchronization (110-240VAC power supply) <input checked="" type="checkbox"/>		N					
NTP Ethernet 10/100BaseT Synchronization (Power Over Ethernet) <input checked="" type="checkbox"/>		P					
NTP Wi-Fi Synchronization (IEEE 802.11 a/b/g/n standards 2.4 Ghz) (110-240VAC power supply) <input checked="" type="checkbox"/>		W					
DCF 24VDC Synchronization (DCF Code + power 24V in pair telecom cable) <input checked="" type="checkbox"/>		B					
MOUNTING							
Wall (bracket included) <input type="checkbox"/>		M					
Anodized grey - Ceiling bracket or flag mounting bracket <input type="checkbox"/>		P					
Specificity (on request)		⊗					
COLOUR CASING							
Anodized grey aluminium <input type="checkbox"/>				7			
Anodized grey aluminium with LED illumination <input type="checkbox"/>				H			
⁽²⁾ Specific RAL colour (on request)				⊗			
DIAL DESIGN							
White dial, arabic figures 1 to 12, small indexes <input type="checkbox"/>					0		
⁽³⁾ Dial following design in data sheet <input checked="" type="checkbox"/>					⊗		
⁽³⁾ Specific dial (on request)						⊗	
SWEEP SECONDS HAND OPTION							
Without sweep seconds hand						0	
⁽⁴⁾ Black sweep seconds hand <input type="checkbox"/>						N	
⁽⁴⁾ Red sweep seconds hand <input type="checkbox"/>						G	
OPTION							
⁽⁵⁾ Synchronization loss Led alarm AFNOR in front face <input type="checkbox"/>							A

- (1) 9600 bauds 8 bits without parity**
- (2) Quantity min. 10 units**
- (3) Quantity min. 5 units**
- (4) Sweep seconds hand not available in pulse version**
- (5) Only for AFNOR NFS 87500 versions (version 7 or 9)**